www.planet.com.tw

IP Surveillance

Vari-Focal
CAM-IVP52V

Vandal-Proof Dome Camera

Secure Your Environment, Property and Life

Quick Installation Guide

PLANET Technology Corp.
2011-AB3790-001

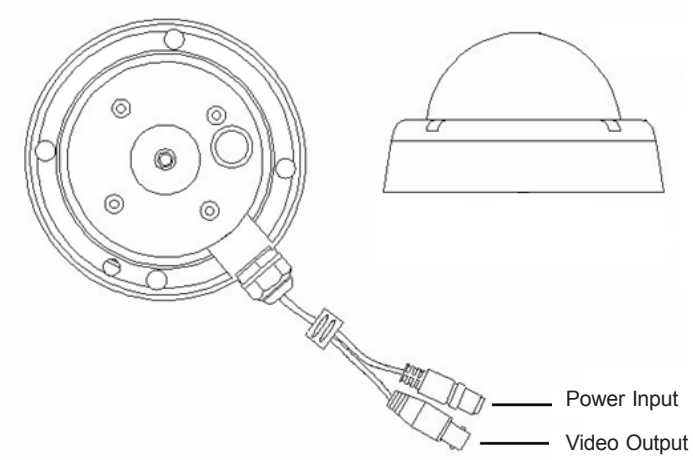

■ Packet Content

CAM-IVP52V x 1

Quick Installation Guide x 1

Wrench x 1

Screw x 4

Rubber Plug x 4

■ Installation

1. Please fix the CAM-IVP52V to a suitable location with the Screws.
2. Use Wrench to open the protect cover and adjust the camera to the correct direction, then closed.
3. Connect Video Output connector to your DVR.
4. Connect a 12V DC power adapter to the Power Input connector.

■ Specification

Image Pick-up Device	SONY 1/3" Color CCD
Effective Picture Elements	NTSC: 811(H) x 508(V) PAL: 795(H) x 596(V)
Horizontal Resolution	520 TV lines
Minimum Illumination	0.06 Lux, IR / 0 Lux
S/N Ratio	More than 50 dB (AGC Off)
Auto Electronic Shutter	NTSC: 1/60s~1/100,000s PAL: 1/50s~1/110,000s
Gamma Characteristic	0.45
Lens Furnished	3.8~9.5mm Vari-Focal / Auto-Iris lens
Gain Control	Automatically
White Balance	Automatically (2500K~9500K)
Synchronous System	Internal
Video Output	1 Vp-p Composite Video / 75 Ohms.
IR LED	8
IR Wavelength	850nm
IR Distance	25M
Vandal Resistant	10 Pound
Power Supply	DC 12V, IR on: 300 mA, IR off: 100 mA
Operating Temp.	-10℃ to 50℃ (14℉ to 122℉)
Dimensions	142mm(Φ) x 86.5mm(H)